


Camera/Head Mounting Instructions

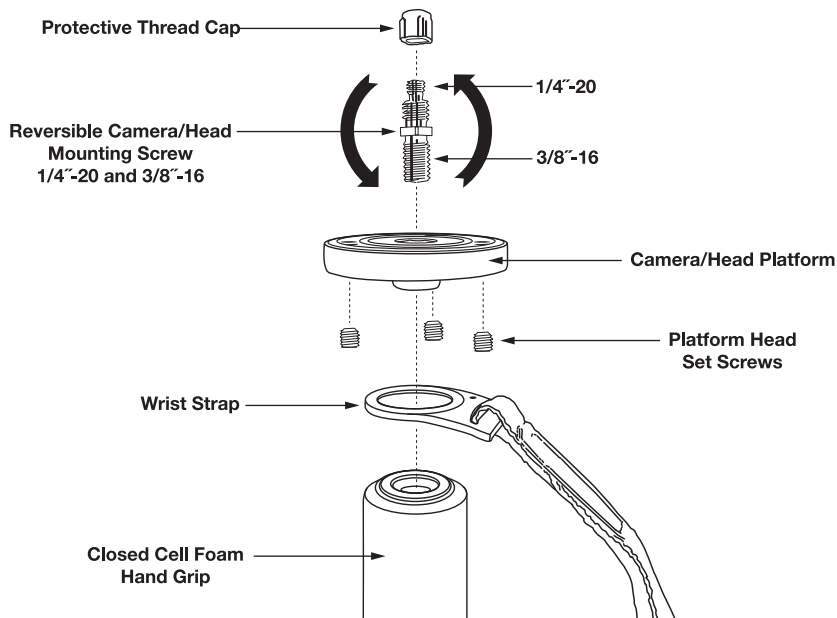

Camera and Head Mounting Instructions for Calumet 8000 Series Carbon Monopods

Your monopod is shipped from the factory with the standard 1/4"-20 reversible camera/head mounting screw in position. Refer to illustration above. To change to 3/8"-16, remove the protective thread cap on the mounting screw by turning counter-clockwise. Set aside. Next, remove the camera/head platform and wrist strap by turning counter-clockwise. Remove and flip the mounting screw 180° and reposition through camera/head platform and wrist strap. **Note: The wrist strap bracket should be angled downward when positioned on top of the hand grip.** Tighten-down assembly to monopod by turning platform clockwise.

Mounting a Camera Directly to the Platform

Determine which half of the reversible camera/head mounting screw is needed for your camera. Mount by using steps as outlined above. Position your camera over the mounting screw and secure to platform by turning monopod clockwise.

Mounting a Head to the Platform

Most heads are 3/8"-16 threaded. Therefore, start with the 3/8"-16 mounting screw secured in position. Position the head over mounting screw and secure by turning monopod clock-wise. Next, tighten-down all three head platform set screws (located on the underside of the platform) by using a metric hex wrench (not included) and turning clockwise. Mount camera to the head using the steps listed above.

WARNING! DO NOT OVERTIGHTEN SCREWS WHEN MOUNTING YOUR CAMERA OR HEAD TO THE MONOPOD. THIS CAN CAUSE PERMANENT DAMAGE TO THE MONOPOD AND OTHER EQUIPMENT.

CALUMET
PHOTOGRAPHIC

www.calumetphoto.com

Made in China